




GKB Combiseeder



Are you looking for a way to easily sow or overseed your sports field or golf course? With the Combiseeder we offer you both solutions. Several types of grass seed can be sown with the Combiseeder. The soil is opened by means of spiked rollers, after which the grass seed is swept in with brushes. A second set of spiked rollers ensures that the holes of the first spikeroll are closed, so that the seeds are protected. This method ensures minimal disturbance of the soil. The Combiseeder is also equipped with 2 water tanks, so that you can easily regulate the pressure by filling the tanks.



The seed dosing system allows you to accurately distribute the amount of seed. It is possible to apply 3 to 50 grams per square meter. The lever behind the seed hopper allows you to adjust the opening of the seed distributor. The Combiseeder is also equipped with a seed bunker indicator, so you can easily see from the tractor how much seed you have left. This will only make your work easier!

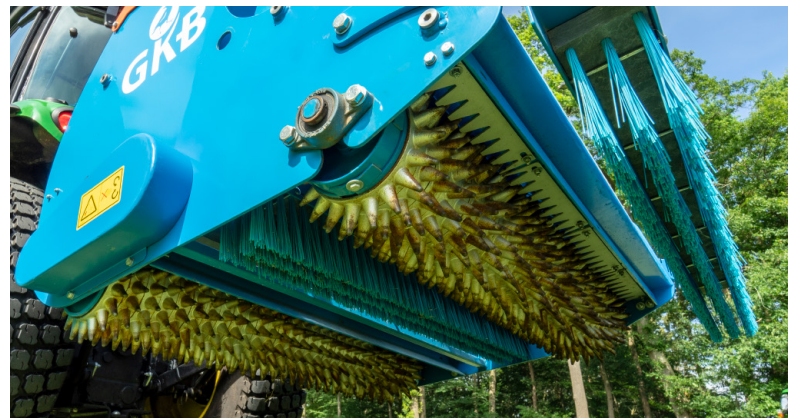

The Combiseeder can be fitted with conical spiked rollers or Cambridge discs. The spiked rollers create 1500 holes per square meter, after which the grass seed falls and is brushed into the holes. The second row of spiked rollers is slightly offset and closes the first row. As a result, the grass seed is buried, so that it cannot be eaten by birds or other animals.

THE WORKER IS KING



Combiseeder

Specifications:

Type	CS120	CS160	CS200	CS240
Working width	120 cm / 48"	160 cm / 63"	200 cm / 79"	240 cm / 95"
Working depth	0 - 3 cm / 0 - 1,2"*	0 - 3 cm / 0 - 1,2"*	0 - 3 cm / 0 - 1,2"*	0 - 3 cm / 0 - 1,2"*
Dimensions (L x W x H)	145 x 145 x 100 cm / 57 x 57 x 40"	145 x 185 x 100 cm / 57 x 73 x 40"	145 x 225 x 100 cm / 57 x 89 x 40"	145 x 265 x 100 cm / 57 x 105 x 40"
Seed distribution	3 - 50 g/m ³	3 - 50 g/m ³	3 - 50 g/m ³	3 - 50 g/m ³
Capacity seedbunker	150 l	200 l	250 l	300 l
Capacity watertanks	150 l	200 l	250 l	300 l
Weight	510 kg / 1125 lbs (with empty water-tanks)	690 kg / 1520 lbs (with empty water-tanks)	800 kg / 1765 lbs (with empty water-tanks)	990 kg / 2185 lbs (with empty water-tanks)
Power requirement	35 - 60 hp	40 - 70 hp	60 - 90 hp	70 - 100 hp
Linkage	Standard three-point hitch cat I - II	Standard three-point hitch cat I - II	Standard three-point hitch cat I - II	Standard three-point hitch cat I - II
Operating speed	0 - 8 km/h / 0 - 5 mph**	0 - 8 km/h / 0 - 5 mph**	0 - 8 km/h / 0 - 5 mph**	0 - 8 km/h / 0 - 5 mph**
Discs				
Conical spikediscs	The spikediscs are suitable for overseeding an existing turf.			
Cambridge discs	The Cambridge discs are suitable for sowing a new turf.			
Comments				
*	The working depth depends entirely on the weight of the machine and the hardness of the soil.			
**	The working speed depends entirely on the weight of the machine and the hardness of the soil.			

THE WORKER IS KING