




GKB Ecodresser



Are you looking for a way to topdress your natural grass sports fields in an environmentally conscious way? Then the GKB Ecodresser is the perfect machine. The Ecodresser was developed in the late 1990s in collaboration with the municipality of Rotterdam and has only been improved over the years. The Ecodresser takes dress soil from your own sports field, so you do not have to supply dress soil yourself. This not only saves costs, but it also prevents you from introducing weeds or other contamination to your field. In addition, the Ecodresser also has an aerating effect!

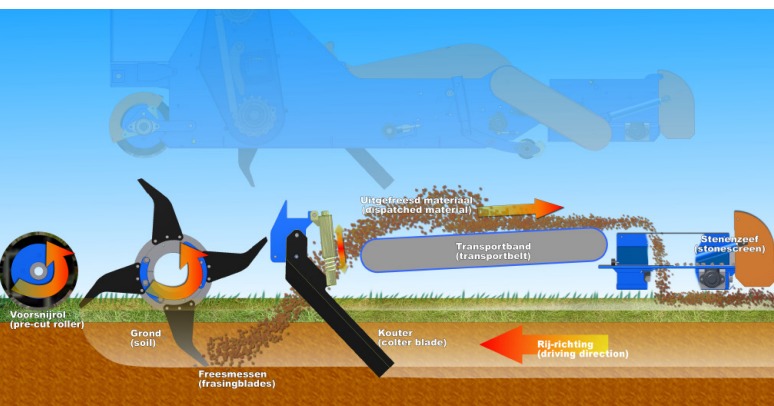

Depending on the version, the Ecodresser makes 4 to 7 slots in the field from which it extracts the dressing soil. The soil is then thrown onto the conveyor belt and then evenly distributed on the field. The coulters sit between the milling cutters and close the slots again. In addition to top dressing, the Ecodresser also has an aerating effect, with 9 to 15 slots per working width!

The Ecodresser is available in 4 different widths. This varies from 1.30m to 2.40m. The ED200 and ED240 are optionally available with a stone sieve. This prevents small excavated stones from ending up on the field. The ED130 and ED160 are supplied without a conveyor belt as standard. This is optionally available to guarantee a better distribution of the dress soil.

THE WORKER IS KING



Ecodresser

Specifications:

Type	ED130	ED160	ED200	ED240
Working width	130 cm / 51"	160 cm / 63"	200 cm / 79"	240 cm / 95"
Working depth	0 - 16 cm / 0 - 6,3"**	0 - 16 cm / 0 - 6,3"**	0 - 20 cm / 0 - 8"**	0 - 20 cm / 0 - 8"**
Dimensions (L x W x H)	170 x 160 x 100 cm / 67 x 63 x 40"	245 x 210 x 130 cm / 97 x 83 x 51"	245 x 240 x 130 cm / 97 x 95 x 51"	245 x 290 x 130 cm / 97 x 114 x 51"
Dimensions incl. stonesieve (L x W x H)	-	-	320 x 250 x 135cm / 126 x 99 x 53"	320 x 290 x 135 cm / 126 x 114 x 51"
Weight	550 kg / 1210 lbs	850 kg / 1875 lbs	1450 kg / 3200 lbs	1650 kg / 3640 lbs
Weight incl. stonesieve	-	-	1730 kg / 3810 lbs	1950 kg / 4300 lbs
Power requirement	35 - 45 hp + creeper gear	65 - 95 hp + creeper gear	80 - 110 hp + creeper gear	90 - 120 hp + creeper gear
Pump capacity oil	30 l/min	30 l/min	30 l/min	30 l/min
Max. hydraulic pressure	150 bar	150 bar	150 bar	150 bar
Linkage	Standard three- point hitch cat I - II	Standard three- point hitch cat I - II	Standard three- point hitch cat I - II	Standard three- point hitch cat I - II
Operating speed	0 - 3 km/h / 0 - 2 mph**	0 - 3 km/h / 0 - 2 mph**	0 - 3 km/h / 0 - 2 mph**	0 - 3 km/h / 0 - 2 mph**

Options

Soil belt	x	x	-	-
Rotor with slip clutches and spring-loaded colter blades	-	-	x	x
Stonescreen	-	-	x	x

Amount of blades

Fraising chisels	16	20	24	28
Slits	4	5	6	7
Coulters	5	6	7	8

Comments

*	The working depth depends entirely on the working method, working depth and surface.
**	The working speed depends entirely on the working method, working depth and surface.

THE WORKER IS KING